

# THE LONG LIGHT (1 Meter)

Dated: 01/07/2023

## The Long Light (LONG1000MM)

'The Long Light' is a bespoke pendant light perfect for hanging over different sized tables, benches & kitchen islands.

Material - Powder-coated Aluminium  
Fixing - Threaded Lamp Holder


## Assembly -

2 x E27 Lamp Holders  
2 x Circular Ceiling Roses 100mm  
2 x 7.6W G95 Round Opal LED Bulbs

Install using **0.75mm 2-Core PVC Cable Flex**. Cable is to be supplied and cut to length by the electrician for desired hanging height.

Individual power feed to each lamp holder. Prevent any overloading of any cable or cord and ensure the even distribution of the load.

The wiring must be done by authorised electricians in accordance with the AS/NZS 3000 local regulations.

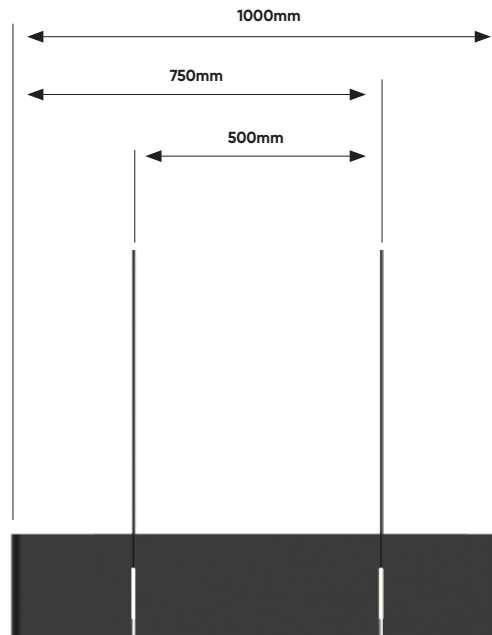

## Thermoplastic E27 Lamp Holder Kit

Cover: threaded  
Rated voltage: 250 Vac  
Terminals: screw terminals for rigid or flexible cables from 0.5 ÷ 2.5 mm<sup>2</sup>  
Fixing: with threaded hole M10x1  
Dimensions  
Diameter: 40 mm  
Height: 54 mm  
Diameter of ring nut: 56 mm

Cable Clamp:  
Material: plastic  
Hole size 10mm

## Prolux R1003 Ceiling Rose

Material: Steel, Plastic Cable Clamp.  
Finish: Matt Black, or White  
Base: 100 x 25 mm, Including Cable Clamp: 100 x 40 mm  
Weight: 160 g

## LED Dimmable G95 Opal Bulb

Brightness: 806 Lumens  
Energy Used: 7.6 Watts  
Efficacy: 106 LM/W  
Light Appearance: Warm White or Cool White  
Colour Temperature: 2700K or 4000K  
CRI: 80  
Life: 15,000 Hours  
Purpose: Indoor  
Dimmable: Yes  
Voltage: 220-240V  
Frequency: 50HZ  
Material: Opal Glass

## The Long Light

- 1). Rated voltage: 230-240V, 50/60 Hz
- 2). Install light bulbs in accordance with the fixture's specifications. E27 7.6W Max G95 Round opal LED bulb only.
- 3). Install using 0.75mm 2-Core PVC cable flex. Cable is to be supplied and cut to length by the electrician for desired hanging height.
- 4). If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the supplier or his service agent or a similar qualified person in order to avoid a hazard.
- 5). Suitable for indoor use for ambient and suitable for ambient Ta: 25- 40°C.
- 6). Wiring has to be done by authorised electrical as per AS/NZS 3000 local regulation.
- 7). The Long Light is to be installed outside arms reach.
- 8). Dimensions:
  - LONG1000MM - 1000mm x 210mm x 115mm
  - LONG1500MM - 1500mm x 210mm x 115mm
  - LONG2000MM - 2000mm x 210mm x 115mm
  - LONG2500MM - 2500mm x 210mm x 115mm
  - LONG3000MM - 3000mm x 210mm x 115mm
- 9). Prevent any overloading of any cable or cord and ensure the even distribution of the load. If the installer is unable to prevent overloading, it is recommended to use suspension string with the luminaire to avoid the stress on the flexible cords.
- 10) If installing with suspension string, use the holes provisioned in the shade to loop suspension string and attach to a hook in ceiling. Alternatively, use at least two ceiling roses located at opposite ends of The Long Light that provision for suspension string.

# THE LONG LIGHT (1.5 Meter)

Dated: 01/07/2023

## The Long Light (LONG1500MM)

'The Long Light' is a bespoke pendant light perfect for hanging over different sized tables, benches & kitchen islands.

Material - Powder-coated Aluminium  
Fixing - Threaded Lamp Holder


## Assembly -

3 x E27 Lamp Holders  
3 x Circular Ceiling Roses 100mm  
3 x 7.6W G95 Round Opal LED Bulbs

Install using **0.75mm 2-Core PVC Cable Flex**. Cable is to be supplied and cut to length by the electrician for desired hanging height.

Individual power feed to each lamp holder. Prevent any overloading of any cable or cord and ensure the even distribution of the load.

The wiring must be done by authorised electricians in accordance with the AS/NZS 3000 local regulations.

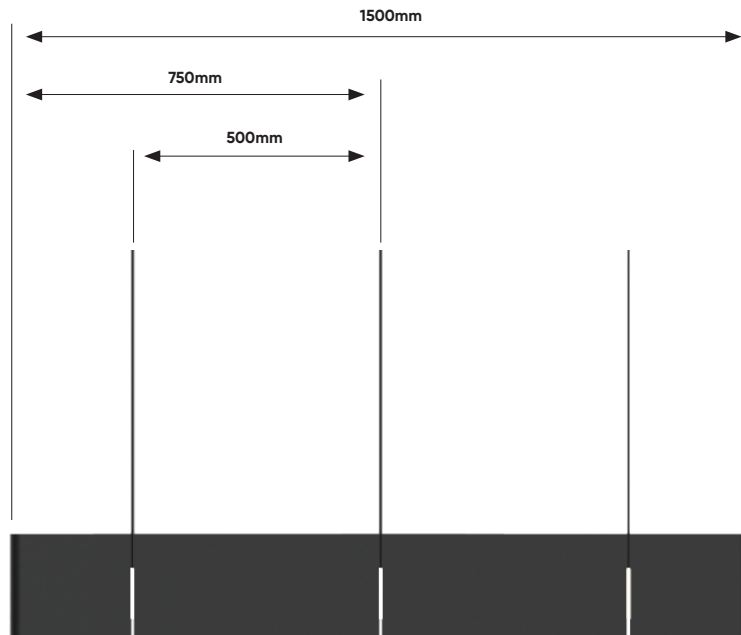

## Thermoplastic E27 Lamp Holder Kit

Cover: threaded  
Rated voltage: 250 Vac  
Terminals: screw terminals for rigid or flexible cables from 0.5 ÷ 2.5 mm<sup>2</sup>  
Fixing: with threaded hole M10x1  
Dimensions  
Diameter: 40 mm  
Height: 54 mm  
Diameter of ring nut: 56 mm

Cable Clamp:  
Material: plastic  
Hole size 10mm

## Prolux R1003 Ceiling Rose

Material: Steel, Plastic Cable Clamp.  
Finish: Matt Black, or White  
Base: 100 x 25 mm, Including Cable Clamp: 100 x 40 mm  
Weight: 160 g

## LED Dimmable G95 Opal Bulb

Brightness: 806 Lumens  
Energy Used: 7.6 Watts  
Efficacy: 106 LM/W  
Light Appearance: Warm White or Cool White  
Colour Temperature: 2700K or 4000K  
CRI: 80  
Life: 15,000 Hours  
Purpose: Indoor  
Dimmable: Yes  
Voltage: 220-240V  
Frequency: 50HZ  
Material: Opal Glass

## The Long Light

- 1). Rated voltage: 230-240V, 50/60 Hz
- 2). Install light bulbs in accordance with the fixture's specifications. E27 7.6W Max G95 Round opal LED bulb only.
- 3). Install using 0.75mm 2-Core PVC cable flex. Cable is to be supplied and cut to length by the electrician for desired hanging height.
- 4). If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the supplier or his service agent or a similar qualified person in order to avoid a hazard.
- 5). Suitable for indoor use for ambient and suitable for ambient Ta: 25- 40°C.
- 6). Wiring has to be done by authorised electrical as per AS/NZS 3000 local regulation.
- 7). The Long Light is to be installed outside arms reach.
- 8). Dimensions:
  - LONG1000MM - 1000mm x 210mm x 115mm
  - LONG1500MM - 1500mm x 210mm x 115mm
  - LONG2000MM - 2000mm x 210mm x 115mm
  - LONG2500MM - 2500mm x 210mm x 115mm
  - LONG3000MM - 3000mm x 210mm x 115mm
- 9). Prevent any overloading of any cable or cord and ensure the even distribution of the load. If the installer is unable to prevent overloading, it is recommended to use suspension string with the luminaire to avoid the stress on the flexible cords.
- 10) If installing with suspension string, use the holes provisioned in the shade to loop suspension string and attach to a hook in ceiling. Alternatively, use at least two ceiling roses located at opposite ends of The Long Light that provision for suspension string.

# THE LONG LIGHT (2.0 Meter)

Dated: 01/07/2023

## The Long Light (LONG2000MM)

'The Long Light' is a bespoke pendant light perfect for hanging over different sized tables, benches & kitchen islands.

Material - Powder-coated Aluminium  
Fixing - Threaded Lamp Holder


## Assembly -

4 x E27 Lamp Holders  
4 x Circular Ceiling Roses 100mm  
4 x 7.6W G95 Round Opal LED Bulbs

Install using **0.75mm 2-Core PVC Cable Flex**. Cable is to be supplied and cut to length by the electrician for desired hanging height.

Individual power feed to each lamp holder. Prevent any overloading of any cable or cord and ensure the even distribution of the load.

The wiring must be done by authorised electricians in accordance with the AS/NZS 3000 local regulations.

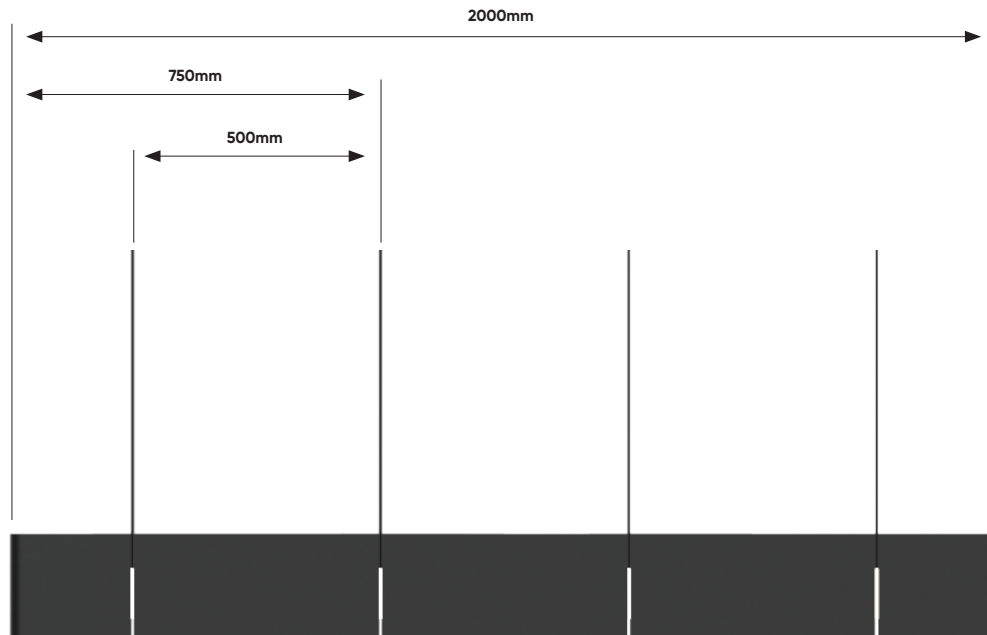

## Thermoplastic E27 Lamp Holder Kit

Cover: threaded  
Rated voltage: 250 Vac  
Terminals: screw terminals for rigid or flexible cables from 0.5 ÷ 2.5 mm<sup>2</sup>  
Fixing: with threaded hole M10x1  
Dimensions  
Diameter: 40 mm  
Height: 54 mm  
Diameter of ring nut: 56 mm

Cable Clamp:  
Material: plastic  
Hole size 10mm

## Prolux R1003 Ceiling Rose

Material: Steel, Plastic Cable Clamp.  
Finish: Matt Black, or White  
Base: 100 x 25 mm, Including Cable Clamp: 100 x 40 mm  
Weight: 160 g

## LED Dimmable G95 Opal Bulb

Brightness: 806 Lumens  
Energy Used: 7.6 Watts  
Efficacy: 106 LM/W  
Light Appearance: Warm White or Cool White  
Colour Temperature: 2700K or 4000K  
CRI: 80  
Life: 15,000 Hours  
Purpose: Indoor  
Dimmable: Yes  
Voltage: 220-240V  
Frequency: 50HZ  
Material: Opal Glass

## The Long Light

- 1). Rated voltage: 230-240V, 50/60 Hz
- 2). Install light bulbs in accordance with the fixture's specifications. E27 7.6W Max G95 Round opal LED bulb only.
- 3). Install using 0.75mm 2-Core PVC cable flex. Cable is to be supplied and cut to length by the electrician for desired hanging height.
- 4). If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the supplier or his service agent or a similar qualified person in order to avoid a hazard.
- 5). Suitable for indoor use for ambient and suitable for ambient Ta: 25- 40°C.
- 6). Wiring has to be done by authorised electrical as per AS/NZS 3000 local regulation.
- 7). The Long Light is to be installed outside arms reach.
- 8). Dimensions:
  - LONG1000MM - 1000mm x 210mm x 115mm
  - LONG1500MM - 1500mm x 210mm x 115mm
  - LONG2000MM - 2000mm x 210mm x 115mm
  - LONG2500MM - 2500mm x 210mm x 115mm
  - LONG3000MM - 3000mm x 210mm x 115mm
- 9). Prevent any overloading of any cable or cord and ensure the even distribution of the load. If the installer is unable to prevent overloading, it is recommended to use suspension string with the luminaire to avoid the stress on the flexible cords.
- 10) If installing with suspension string, use the holes provisioned in the shade to loop suspension string and attach to a hook in ceiling. Alternatively, use at least two ceiling roses located at opposite ends of The Long Light that provision for suspension string.

# THE LONG LIGHT (2.5 Meter)

Dated: 01/07/2023

## The Long Light (LONG2500MM)

'The Long Light' is a bespoke pendant light perfect for hanging over different sized tables, benches & kitchen islands.

Material - Powder-coated Aluminium  
Fixing - Threaded Lamp Holder


## Assembly -

5 x E27 Lamp Holders  
5 x Circular Ceiling Roses 100mm  
5 x 7.6W G95 Round Opal LED Bulbs

Install using **0.75mm 2-Core PVC Cable Flex**. Cable is to be supplied and cut to length by the electrician for desired hanging height.

Individual power feed to each lamp holder. Prevent any overloading of any cable or cord and ensure the even distribution of the load.

The wiring must be done by authorised electricians in accordance with the AS/NZS 3000 local regulations.

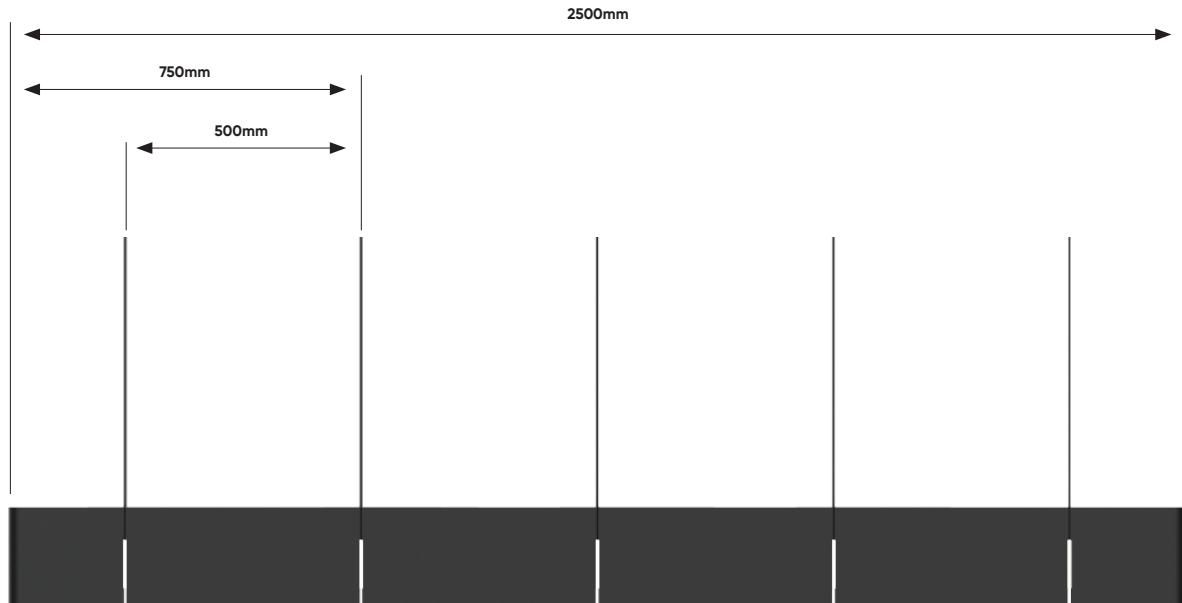

## Thermoplastic E27 Lamp Holder Kit

Cover: threaded  
Rated voltage: 250 Vac  
Terminals: screw terminals for rigid or flexible cables from 0.5 ÷ 2.5 mm<sup>2</sup>  
Fixing: with threaded hole M10x1  
Dimensions  
Diameter: 40 mm  
Height: 54 mm  
Diameter of ring nut: 56 mm

Cable Clamp:  
Material: plastic  
Hole size 10mm

## Prolux R1003 Ceiling Rose

Material: Steel, Plastic Cable Clamp.  
Finish: Matt Black, or White  
Base: 100 x 25 mm, Including Cable Clamp: 100 x 40 mm  
Weight: 160 g

## LED Dimmable G95 Opal Bulb

Brightness: 806 Lumens  
Energy Used: 7.6 Watts  
Efficacy: 106 LM/W  
Light Appearance: Warm White or Cool White  
Colour Temperature: 2700K or 4000K  
CRI: 80  
Life: 15,000 Hours  
Purpose: Indoor  
Dimmable: Yes  
Voltage: 220-240V  
Frequency: 50HZ  
Material: Opal Glass

## The Long Light

- 1). Rated voltage: 230-240V, 50/60 Hz
- 2). Install light bulbs in accordance with the fixture's specifications. E27 7.6W Max G95 Round opal LED bulb only.
- 3). Install using 0.75mm 2-Core PVC cable flex. Cable is to be supplied and cut to length by the electrician for desired hanging height.
- 4). If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the supplier or his service agent or a similar qualified person in order to avoid a hazard.
- 5). Suitable for indoor use for ambient and suitable for ambient Ta: 25- 40°C.
- 6). Wiring has to be done by authorised electrical as per AS/NZS 3000 local regulation.
- 7). The Long Light is to be installed outside arms reach.
- 8). Dimensions:
  - LONG1000MM - 1000mm x 210mm x 115mm
  - LONG1500MM - 1500mm x 210mm x 115mm
  - LONG2000MM - 2000mm x 210mm x 115mm
  - LONG2500MM - 2500mm x 210mm x 115mm
  - LONG3000MM - 3000mm x 210mm x 115mm
- 9). Prevent any overloading of any cable or cord and ensure the even distribution of the load. If the installer is unable to prevent overloading, it is recommended to use suspension string with the luminaire to avoid the stress on the flexible cords.
- 10) If installing with suspension string, use the holes provisioned in the shade to loop suspension string and attach to a hook in ceiling. Alternatively, use at least two ceiling roses located at opposite ends of The Long Light that provision for suspension string.

# THE LONG LIGHT (3.0 Meter)

Dated: 01/07/2023

## The Long Light (LONG3000MM)

'The Long Light' is a bespoke pendant light perfect for hanging over different sized tables, benches & kitchen islands.

Material - Powder-coated Aluminium  
Fixing - Threaded Lamp Holder


## Assembly -

6 x E27 Lamp Holders  
6 x Circular Ceiling Roses 100mm  
6 x 7.6W G95 Round Opal LED Bulbs

Install using **0.75mm 2-Core PVC Cable Flex**. Cable is to be supplied and cut to length by the electrician for desired hanging height.

Individual power feed to each lamp holder. Prevent any overloading of any cable or cord and ensure the even distribution of the load.

The wiring must be done by authorised electricians in accordance with the AS/NZS 3000 local regulations.

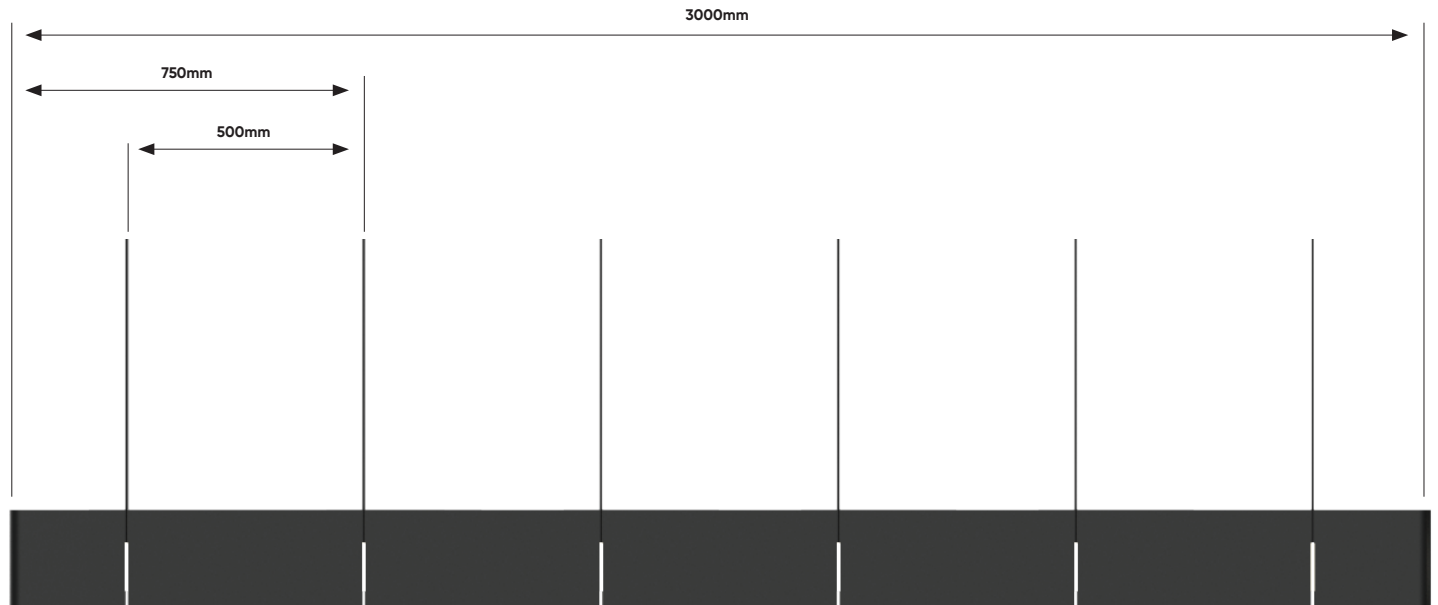

## Thermoplastic E27 Lamp Holder Kit

Cover: threaded  
Rated voltage: 250 Vac  
Terminals: screw terminals for rigid or flexible cables from 0.5 ÷ 2.5 mm<sup>2</sup>  
Fixing: with threaded hole M10x1  
Dimensions  
Diameter: 40 mm  
Height: 54 mm  
Diameter of ring nut: 56 mm

Cable Clamp:  
Material: plastic  
Hole size 10mm

## Prolux R1003 Ceiling Rose

Material: Steel, Plastic Cable Clamp.  
Finish: Matt Black, or White  
Base: 100 x 25 mm, Including Cable Clamp: 100 x 40 mm  
Weight: 160 g

## LED Dimmable G95 Opal Bulb

Brightness: 806 Lumens  
Energy Used: 7.6 Watts  
Efficacy: 106 LM/W  
Light Appearance: Warm White or Cool White  
Colour Temperature: 2700K or 4000K  
CRI: 80  
Life: 15,000 Hours  
Purpose: Indoor  
Dimmable: Yes  
Voltage: 220-240V  
Frequency: 50HZ  
Material: Opal Glass

## The Long Light

- 1). Rated voltage: 230-240V, 50/60 Hz
- 2). Install light bulbs in accordance with the fixture's specifications. E27 7.6W Max G95 Round opal LED bulb only.
- 3). Install using 0.75mm 2-Core PVC cable flex. Cable is to be supplied and cut to length by the electrician for desired hanging height.
- 4). If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the supplier or his service agent or a similar qualified person in order to avoid a hazard.
- 5). Suitable for indoor use for ambient and suitable for ambient Ta: 25- 40°C.
- 6). Wiring has to be done by authorised electrical as per AS/NZS 3000 local regulation.
- 7). The Long Light is to be installed outside arms reach.
- 8). Dimensions:
  - LONG1000MM - 1000mm x 210mm x 115mm
  - LONG1500MM - 1500mm x 210mm x 115mm
  - LONG2000MM - 2000mm x 210mm x 115mm
  - LONG2500MM - 2500mm x 210mm x 115mm
  - LONG3000MM - 3000mm x 210mm x 115mm
- 9). Prevent any overloading of any cable or cord and ensure the even distribution of the load. If the installer is unable to prevent overloading, it is recommended to use suspension string with the luminaire to avoid the stress on the flexible cords.
- 10) If installing with suspension string, use the holes provisioned in the shade to loop suspension string and attach to a hook in ceiling. Alternatively, use at least two ceiling roses located at opposite ends of The Long Light that provision for suspension string.